

Made in
Germany

Kahler

Our large
aluminum
truck
program



aluminium trucks



The advantages at a glance



Straight end of tubes with rocker enabling straightforward, convenient intervention even at high loads.



Reinforced, unbreakable gripping bar. Ergonomically adapted gripping elements. With safety handles on request.



Plastic runners for safely sliding over stairs and steps without damaging them.



Stable nose plate mounting made from resilient aluminium section. Unbreakable wheel guard for optimal load position.



Whetted nose plate with sliding grooves to make it easier to slide under the load. Rounded rear of nose plate. Cranked axle to enable high loads to be tilted more easily.



Double ball-bearing mounted quality wheel with fast-mounting rim. If there is an air-defect, fast, simple mounting without removing the rim from the axle. Alternatively available with polyurethane or solid-rubber tyres.

Aluminium stacking truck

Order no.: 8 150 A00 K 262



Advantages:	- double ball-bearing mounted wheels with fast-mounted rim - rounded rear of nose plate - whetted nose plate - ergonomically adapted gripping elements; reinforced, unbreakable gripping bar - cranked axle
Height:	1300 mm
Nose plate:	Typ A
Nose plate width:	265 mm
Nose plate reach:	245 mm
Track width:	470 mm
Load-bearing capacity:	300 kg
Wheels:	Lug tread pneumatic tyres, 260 x 85 mm
Material:	Aluminium

Configure your aluminium truck. The following attachments/modifications are available:




Mudguards made from impact-resistant special aluminium profile



Safety handles




Straight tube ending with rocker



Type-C nose plate



Typ D nose plate



Typ E nose plate



Brake



Multiple tyre reinforcement
Pneumatic,
260 x 85 mm
...264



Groove tyres
Pneumatic,
260 x 85 mm
...261



Polyurethane wheel,
no more punctures –
puncture-proof
...258



Highly elastic solid-
rubberwheel
250 x 60 mm
...257

Modular aluminium truck

Aluminium stacking truck



Order no.: 8 160 A70 0 262

Height:	1300 mm
Nose plate:	Typ A
Nose plate width:	265 mm
Nose plate reach:	245 mm
Track width:	470 mm
Load-bearing capacity:	300 kg
Wheels:	Lug tread pneumatic tyres, 260 x 85 mm
Material:	Aluminium

Aluminium stacking truck



Order no.: 7 162 A70 0 262

Height:	1500 mm
Nose plate:	Typ A
Nose plate width:	265 mm
Nose plate reach:	245 mm
Track width:	470 mm
Load-bearing capacity:	300 kg
Wheels:	Lug tread pneumatic tyres, 260 x 85 mm
Material:	Aluminium

Aluminium stacking truck



Order no.: 7 164 A70 0 257

Height:	1700 mm
Nose plate:	Typ A
Nose plate width:	265 mm
Nose plate reach:	245 mm
Track width:	470 mm
Load-bearing capacity:	300 kg
Wheels:	highly-elastic solid rubber wheel, 250 x 60 mm
Material:	Aluminium

Aluminium stacking truck with parallel runners



Order no.: 8 153 A00 K 262

Height:	1300 mm
Nose plate:	Typ A
Nose plate width:	265 mm
Nose plate reach:	245 mm
Track width:	470 mm
Load-bearing capacity:	300 kg
Wheels:	Lug tread pneumatic tyres, 260 x 85 mm
Material:	Aluminium

Aluminium stacking truck with additional longitudinal rod for small goods



Order no.: 8 159 A70 K 261

Height:	1300 mm
Nose plate:	Typ A
Nose plate width:	265 mm
Nose plate reach:	245 mm
Track width:	470 mm
Load-bearing capacity:	300 kg
Wheels:	Groove tread pneumatic tyres, 260 x 85 mm
Material:	Aluminium

Do you want different tyres?



Multiple tyre reinforcement
Pneumatic,
260 x 85 mm
...264



Groove tyres
Pneumatic,
260 x 85 mm
...261



Lug-tread tyres
Pneumatic,
260 x 85 mm
...262



Polyurethane wheel, no
more punctures
puncture-proof wheel
...258



Highly elastic solid-
rubberwheel
250 x 60 mm
...257

This is how it works:
Replace the last three
digits (red) of the order
no. with the three-digit
number of the tyres of
your choice.

Modular aluminium truck

Aluminium stacking truck for 2 stacks



Order no.: 8 250 G70 K 262

Height:	1300 mm
Nose plate width:	420 mm
Nose plate reach:	180 mm
Track width:	470 mm
Load-bearing capacity:	300 kg
Wheels:	Lug tread pneumatic tyres, 260x85 mm
Material:	Aluminium

Aluminium stacking truck with folding, height-adjustable holding bracket for chairs



Order no.: 8 157 A7L K 261

Height:	1300 mm
Nose plate/width:	Typ A/265 mm
Nose plate reach:	245 mm
Track width:	470 mm
Load-bearing capacity:	250 kg
Wheels:	Groove tread pneumatic tyres, 260x85 mm
Material:	Aluminium



Do you want different tyres?



Multiple tyre reinforcement
Pneumatic,
260x85 mm
...264



Groove tyres
Pneumatic,
260x85 mm
...261



Lug-tread tyres
Pneumatic,
260x85 mm
...262



Polyurethane wheel, no more punctures
puncture-proof wheel
...258



Highly elastic solid-rubberwheel
250x60 mm
...257


This is how it works:
Replace the last three digits (red) of the order no. with the three-digit number of the tyres of your choice.

Aluminum stacking truck for parcels with 3 rock-ers, 1 longitudinal strut and folding nose plate



Order no.: 7 330 P70 0 257

Height:	1150 mm
Nose plate width:	505 mm
Nose plate reach:	505 mm
Track width:	470 mm
Load-bearing capacity:	300 kg
Wheels:	highly-elastic solid rubber wheel, 250x60 mm
Material:	Aluminium

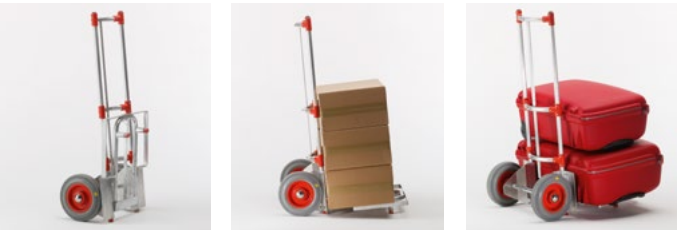

Aluminium folding stacking truck



Order no.: 8 320 A00 0 261 without wheel guard with small nose plate

Height:	1150 mm
Nose plate/width:	Typ A/265 mm
Nose plate reach:	245 mm
Track width:	470 mm
Load-bearing capacity:	200 kg
Wheels:	Groove tread pneumatic tyres, 260x85 mm
Material:	Aluminium



8 320 D00 0 261 with wheel guard with large nose plate

Height:	1150 mm
Nose plate/width:	Typ D/340 mm
Nose plate reach:	280 mm
Track width:	470 mm
Load-bearing capacity:	200 kg
Wheels:	Groove tread pneumatic tyres, 260x85 mm
Material:	Aluminium





The advantages at a glance



Reinforced, unbreakable handle tube.
Ergonomically adapted gripping elements.



Plastic runners for safely sliding over stairs and steps without damaging them.



Quality-finished steel hooks, unbreakable and gentle on boxes.
The built-in torsion spring automatically swings the box attachment out of the box when the truck is put down – without it getting caught or twisted.



Stable nose plate mounting made from resilient aluminium section.
Unbreakable wheel guard for optimal load position.



Whetted nose plate with sliding grooves to make it easier to slide under the load.
Rounded rear of nose plate.
Cranked axle to enable high loads to be tilted more easily.



Double ball-bearing mounted quality wheel with fast-mounting rim. If there is an air-defect, fast, simple mounting without removing the rim from the axle.
Alternatively available with polyurethane or solid-rubber tyres.

Aluminium stacking truck for hanging-in boxes

Order no.:

8 155 B70 K 262



Advantages:	- double ball-bearing mounted wheels with fast-mounted rim - rounded rear of nose plate - whetted nose plate - ergonomically adapted gripping elements; reinforced, unbreakable gripping bar - cranked axle
Height:	1300 mm
Nose plate:	Typ B
Nose plate width:	200 mm
Nose plate reach:	190 mm
Track width:	470 mm
Load-bearing capacity:	250 kg
Wheels:	Lug tread pneumatic tyres, 260x85 mm
Material:	Aluminium

Configure your aluminium truck. The following attachments/modifications are available:



Lateral retainer, can be folded back
clear width 560 mm




Safety handles



Straight tube end, with rocker



Truck **without** folding nose plate – only for hanging-in boxes.



KEG-mounting, folds back.



Hook-in rail for 2-stack transportation adjustable.



Brake



Multiple tyre reinforcement
Pneumatic,
260x85 mm
...264



Groove tyres
Pneumatic,
260x85 mm
...261



Polyurethane wheel,
no more punctures –
puncture-proof
...258



Highly elastic solid-rubberwheel
250x60 mm
...257

Modular aluminium truck

Aluminium stacking truck for hanging-in boxes



Order no.: 8 165 B7L 0 262

Height:	1300 mm
Nose plate/width	Typ B/200 mm
Nose plate reach:	190 mm
Track width:	470 mm
Load-bearing capacity:	250 kg
Wheels:	Lug tread pneumatic tyres, 260x85 mm
Material:	Aluminium

Aluminium stacking truck for hanging-in boxes



Order no.: 7 167 B7L 0 262

Height:	1700 mm
Nose plate/width	Typ B/200 mm
Nose plate reach:	190 mm
Track width:	470 mm
Load-bearing capacity:	250 kg
Wheels:	Lug tread pneumatic tyres, 260x85 mm
Material:	Aluminium

Do you want different tyres?



Multiple tyre reinforcement
Pneumatic,
260x85 mm
...264



Groove tyres
Pneumatic,
260x85 mm
...261



Lug-tread tyres
Pneumatic,
260x85 mm
...262



Polyurethane wheel, no more punctures
puncture-proof wheel
...258



Highly elastic solid-rubberwheel
250x60 mm
...257

This is how it works:
Replace the last three digits (red) of the order no. with the three-digit number of the tyres of your choice.

Aluminium stacking truck with mount for hanging-in 2 stacks of boxes



Order no.: 7 219 B7L 0 261

Height:	1500 mm
Nose plate/width	Typ B/200 mm
Nose plate reach:	190 mm
Track width:	470 mm
Load-bearing capacity:	300 kg
Wheels:	Groove tread pneumatic tyres, 260x85 mm
Material:	Aluminium



Standard with adjustable box spacers



Accessories for aluminium stacking truck



Retainer, 560 mm
can be folded back.
Order no.: 90 005



Keg suspension
can be retrofitted.
Order no.: 90 034



Hot-dip galvanised
steel retainer for lorries
Order no.: 90 015





Advertising panel for
aluminium stacking
trucks
Order no.: 90 009




Hook-in rail for 2-stack
transportation.
Order no.: 90 036



Carrying handle
Order no.: 90 017

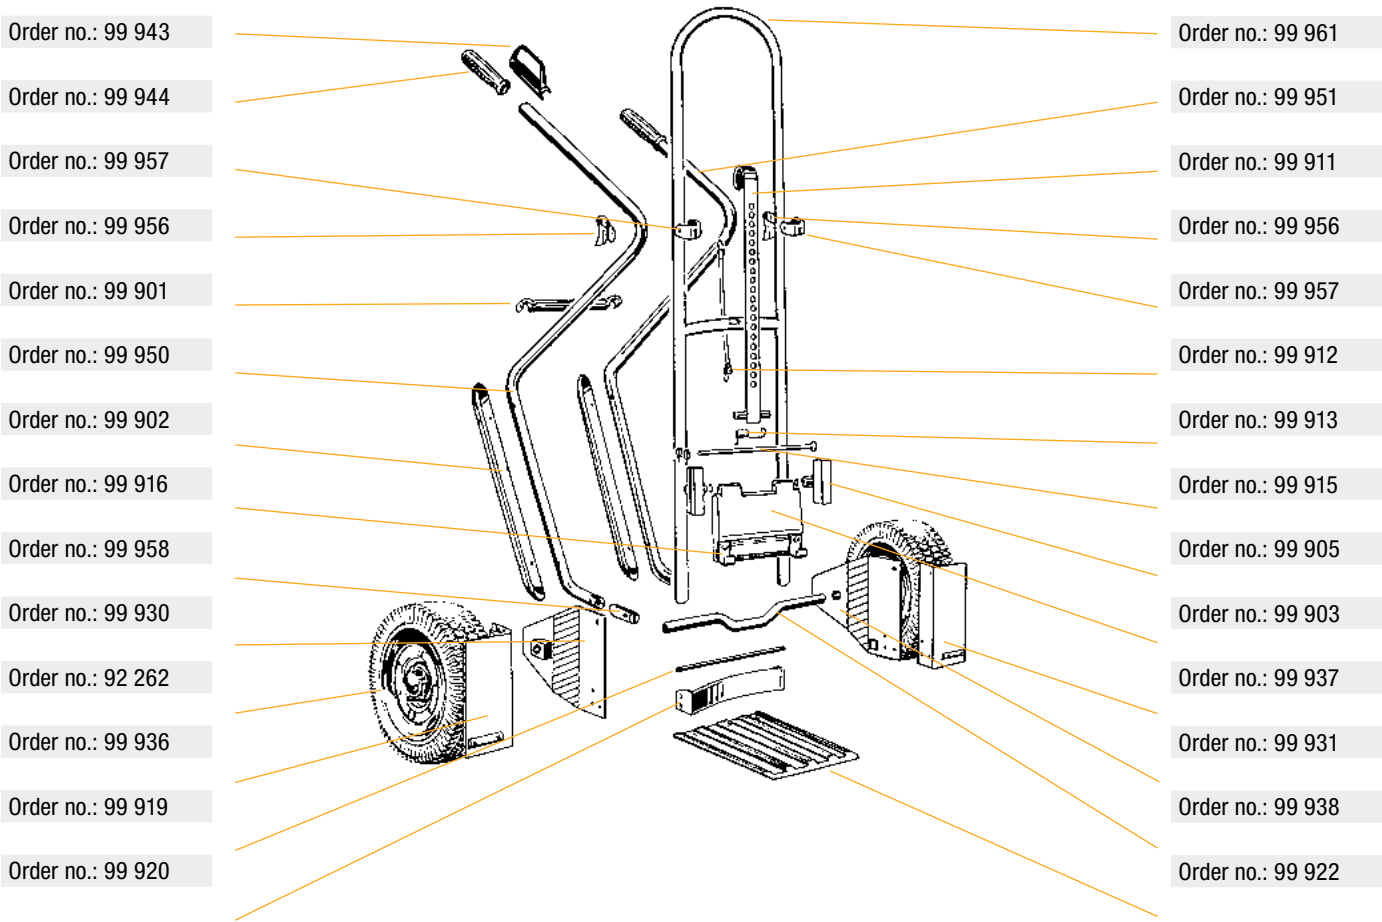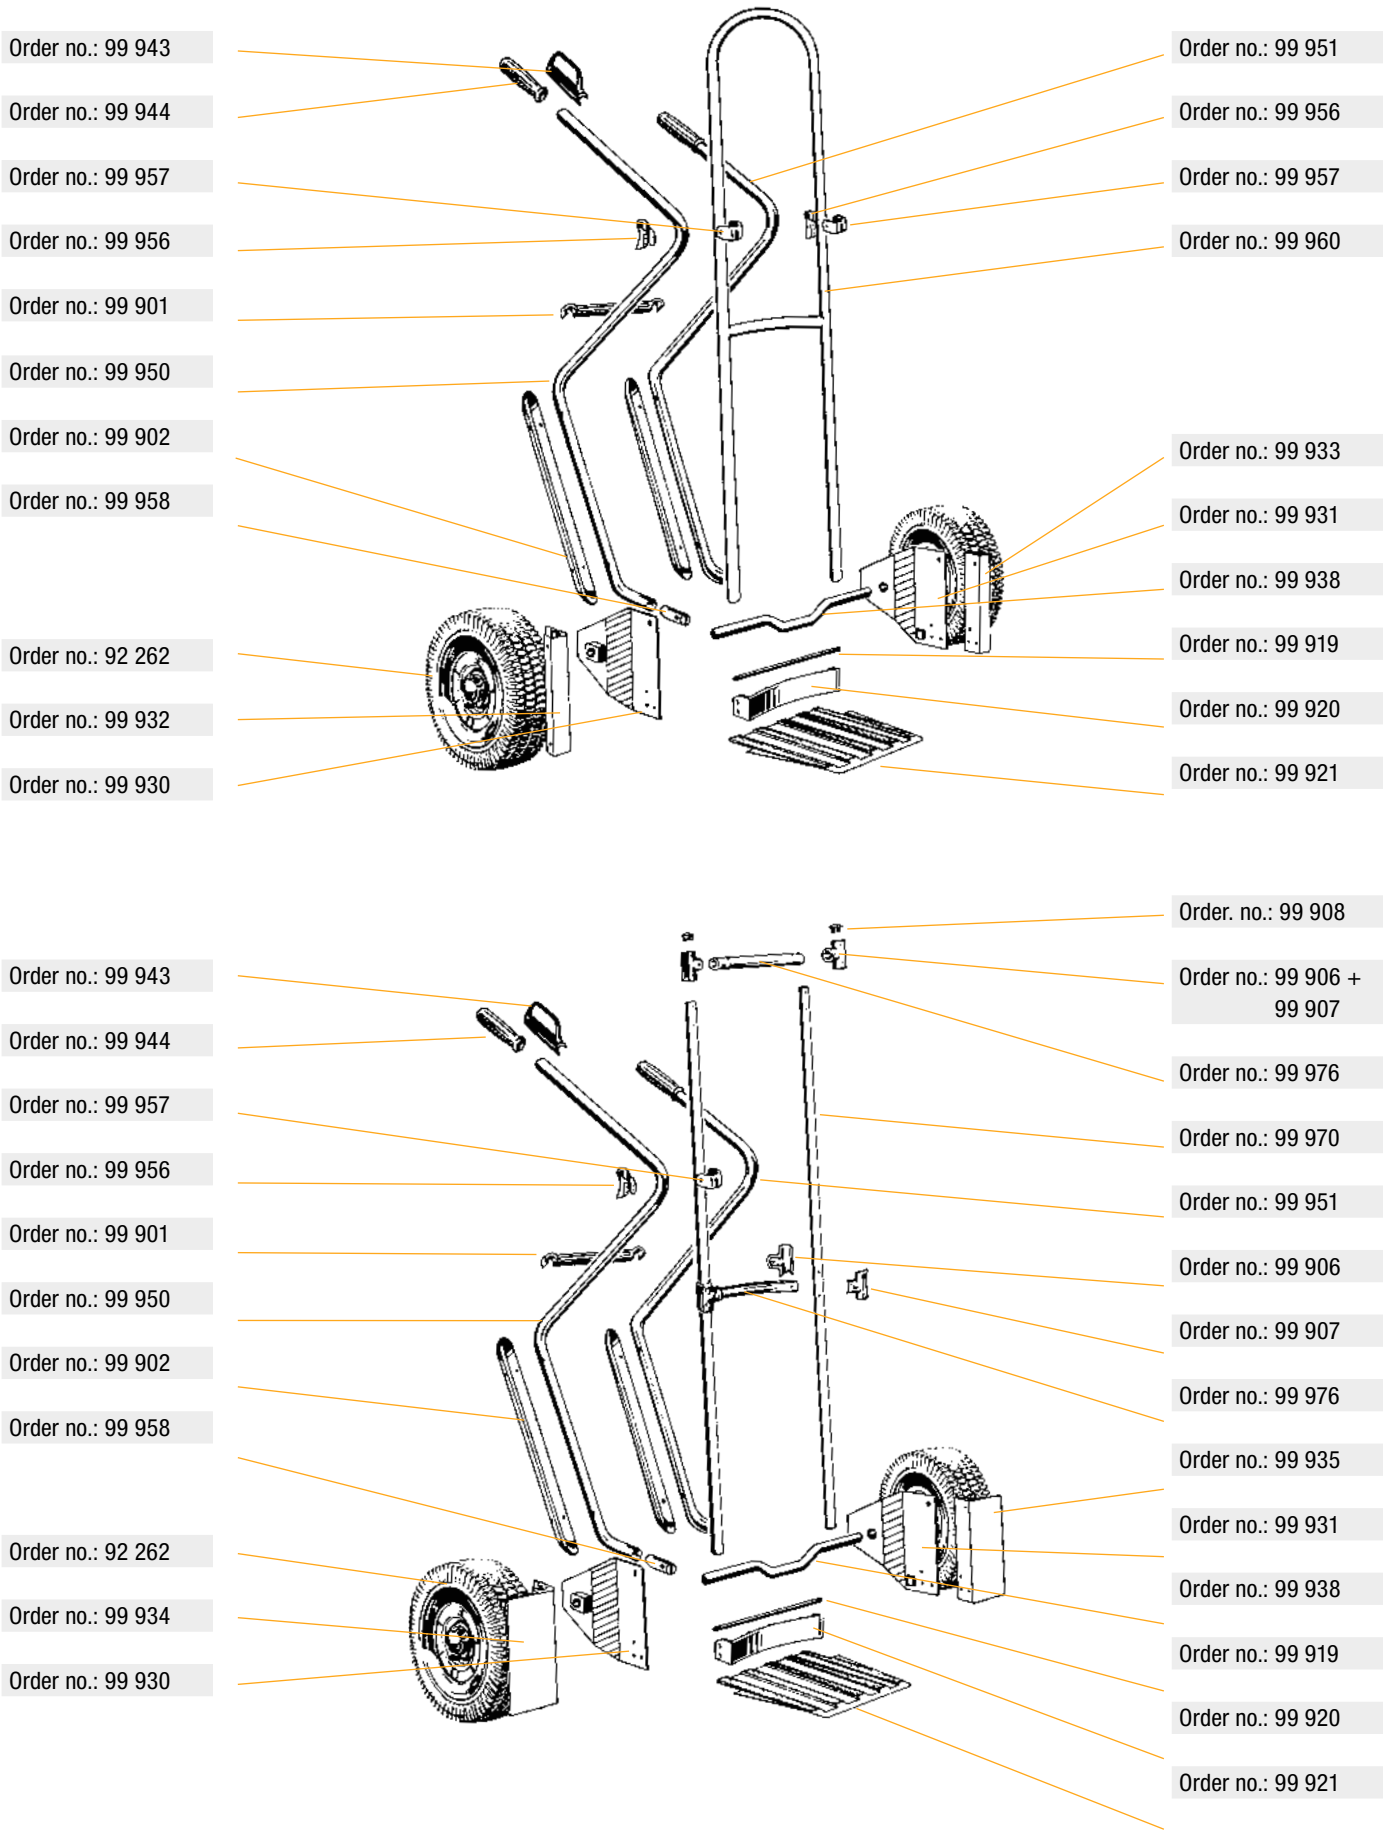

Spare parts for nose plates aluminium

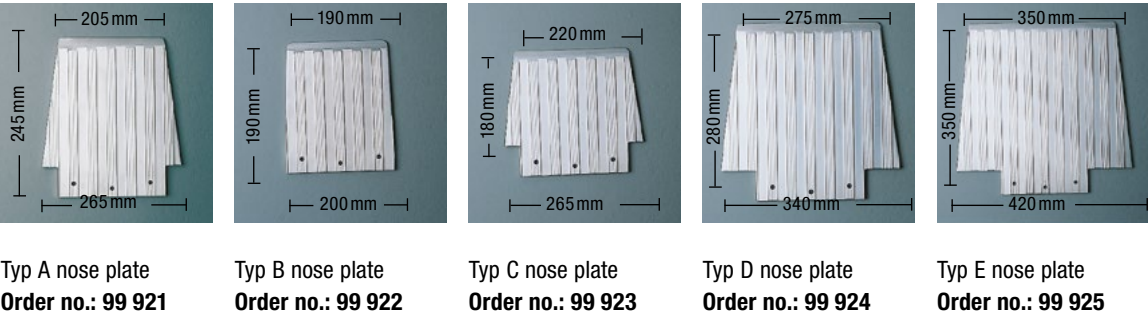

Modular aluminium truck – spare parts

Spare parts, wheels



Cover for multiply reinforced tyres, Pr V60
4-ply for plastic rim, Ø 260 mm
Order no.: 92 234



Groove tread cover for plastic rim,
Ø 260 mm
Order no.: 92 201



Lug tread cover for plastic rim,
Ø 260 mm
Order no.: 92 202



Tube cover for plastic rim,
Ø 260 mm
Order no.: 92 216



Rim with ball bearing without rim ring
Order no.: 92 260

Rim ring
Order no.: 92 267

Cover
Order no.: 92 269

Washer
Order no.: 96 410

Ball bearing
Order no.: 92 268

Circlip
Order no.: 96 401

Spacer sleeve, black
Order no.: 96 411

Wheels complete with rim



Multiply reinforced
tyres
Pneumatic,
260 x 85 mm
Order no.: 92 264



Groove tyres
Pneumatic,
260 x 85 mm
Order no.: 92 261



Lug-tread tyres
Pneumatic,
260 x 85 mm
Order no.: 92 262



Polyurethane wheel, no
more punctures
puncture-proof wheel
Order no.: 92 258



Highly elastic solid-
rubberwheel
250 x 60 mm
Order no.: 92 257

All details in this prospectus are approximate.
We reserve the right to change the design in the
interests of technical progress. Colours non-
binding. For the rest our Terms and Conditions of
Sale and Supply apply.



www.kahler.de



Germany

Kahler GmbH
Werkring 6
D-89290 Buch

Tel. +49 (0)7343 9227-0
Fax +49 (0)7343 9227-79
E-mail info@kahler.de
Web www.kahler.de

Switzerland

HERS GmbH
Industriestrasse 17
CH-4415 Lausen

Tel. +41 (0)61 90699-99
E-mail info@hers.ch
Web www.hers.ch